




MCS40 Mobile Pack

🇬🇧 High-performance multi-blade unit, manual feeding

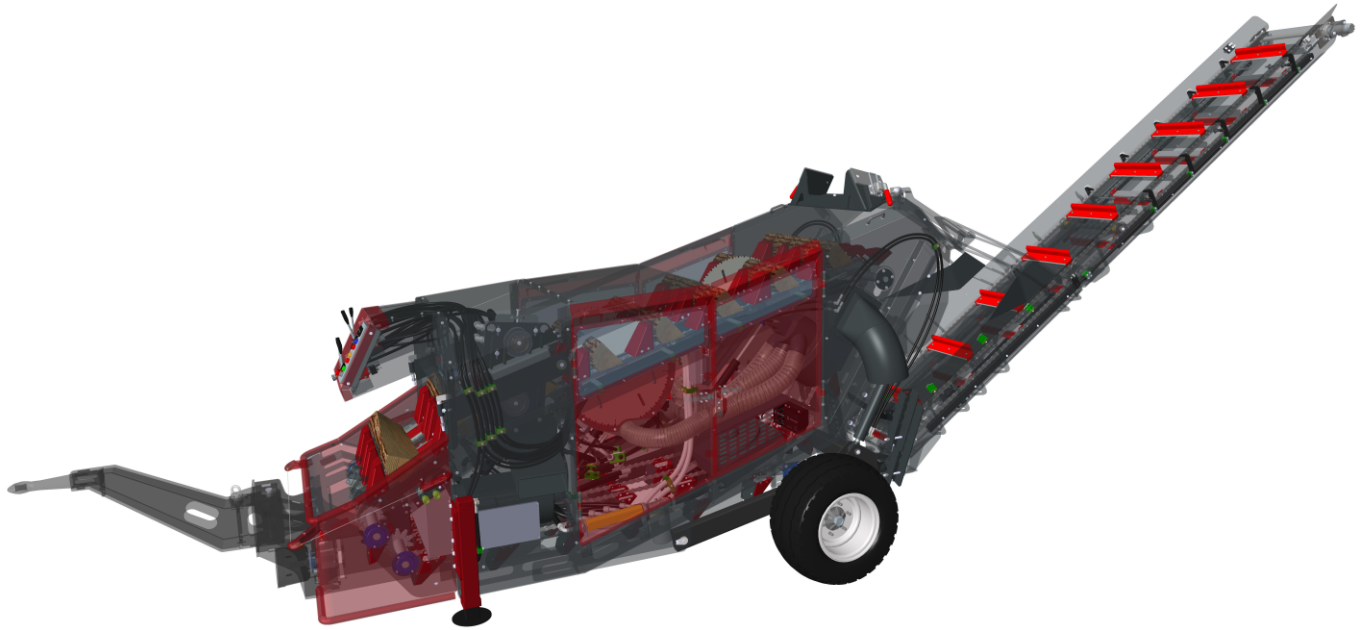

The Mobile Pack is ideal for producers of firewood whose organization requires great flexibility of work as well as good mobility, whether on one or between different sites. In this configuration of the LOGCUT MCS40, an operator can saw a given volume of wood in record time regardless of the length requested, he only has to manually load the machine.


All controls are accessible from the workstation, including cutting length changeover in less than 30 seconds. The loading area is lowered to the maximum and accessible from the front and both sides to facilitate log loading. Wood referencing, cutting to length as well as the various cuts required and the screening of the logs are all carried out in a single passage through the machine.

This equipment package is mainly intended for operators dealing with 800 to 2500 cords per year and looking for efficient, compact and easy-to-handle work equipment.

In its Mobile Pack version, the minimal average production observed for the LOGCUT MCS40 is 3.5 cord per hour . This production rate is limited by the operator's work pace, as the sawing unit is able to offer much higher capacities. Should the need arise, upgrading the LOGCUT MCS40 to a Pack Static or Pack Profit remains perfectly possible.

A tractor with a minimum power of 80hp is highly recommended for PTO drive.

Mobile Pack Dimensions

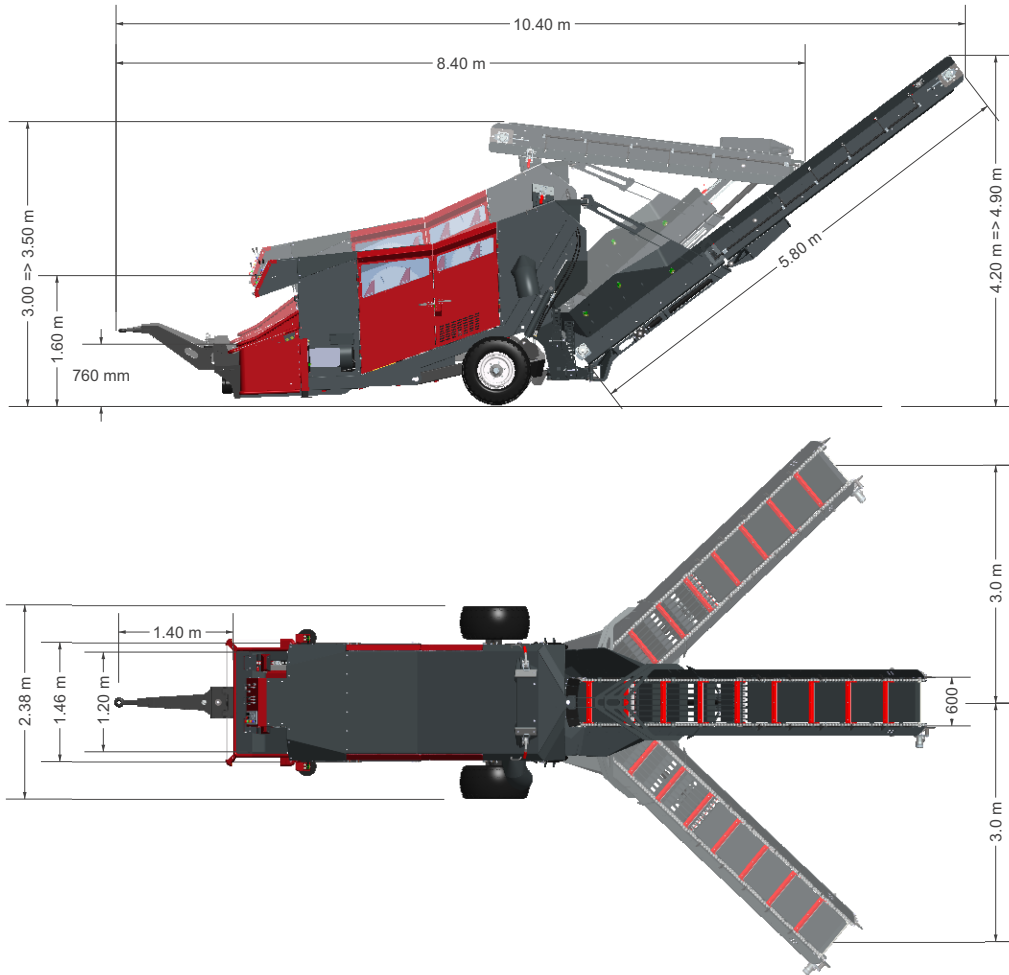

Mobile Pack standard equipment list

Z	Very high-performance multi-blade sawing unit Machine equipped with 3 circular saws Ø735mm with hydraulic drive.	6 360 kg
M	Cut-to-length saws at 1.02m. Lateral evacuation of extra lengths.	
T	Evacuation conveyor hydraulically adjustable to +/- 3m linked to the main chassis allowing the loading of trailers up to a height of 3.5m. Hydraulic unfolding. High resistance cleats mounted on chains. Passive screener for cleaning logs.	
C	Agricultural chassis with liftable axle and hydraulic stabilizing legs, including wheel wedges.	
S	Removable Cat. 2 lower linkage hitch (not represented on this paper).	

Mobile Pack Options

A	Auxiliary hydraulic output.	+30kg
B	Original filling with biodegradable hydraulic oil.	NA
H25	Road approval 25km/h. Including a visual signalling kit and machine registration.	+50kg

Your local dealer

