




MCS40 Static Pack

🇬🇧 Very high-performance automated static sawing unit

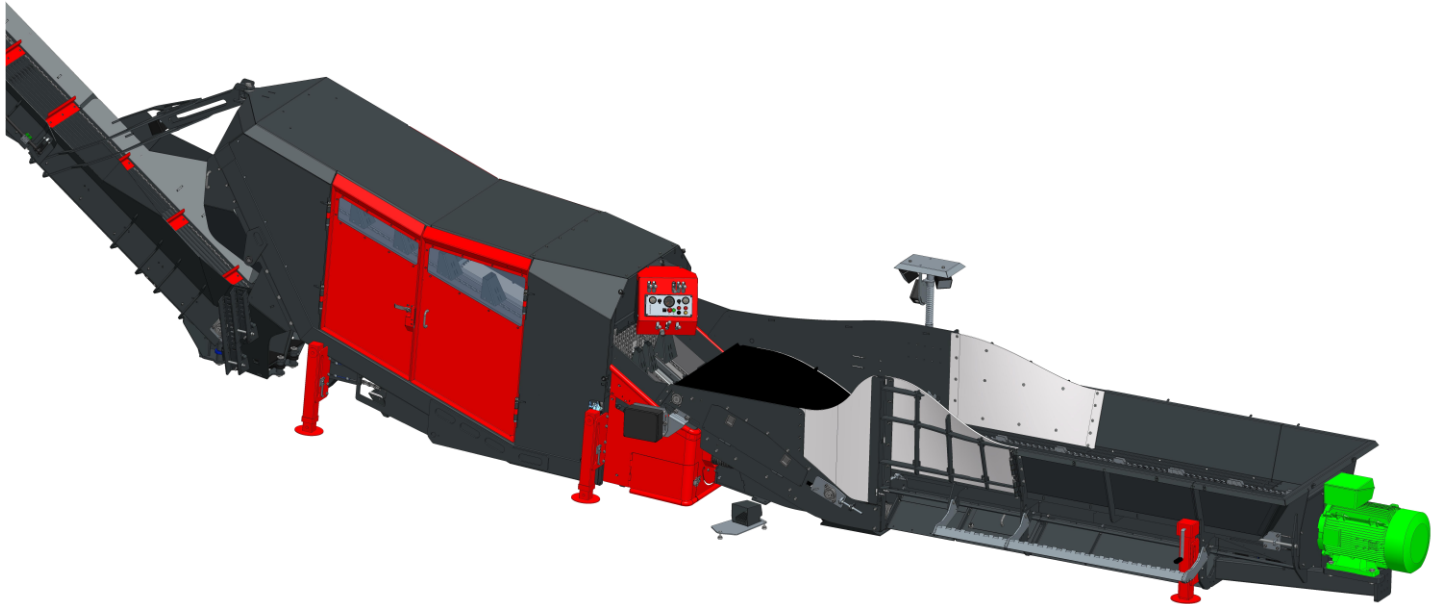


In this Static Pack version, the LOGCUT MCS40 is a stationary machine. The ergonomics of the workstation are aimed to reduce the physical efforts of the operator to their minimum while maximizing the performance of the machine, like on the version PACK PROFIT. The machine consists in particular of the sawing unit, a retractable evacuation mat, as well as a loading platform with a display system. The log loading area is adjustable from 5 to 9.5 meters length.

This configuration is ideal for producers processing a volume of wood ranging from 2500 cords to several thousands cords per year and preferring a stationary installation and high loading capacities, in order to guarantee a transformation of wood at a sustained rate and without interruption .

In its Static Pack version, the minimum production observed for the LOGCUT MCS40 is 8 cords per hour on average. The machine's capacities allow for much greater hourly production peaks.

This configuration requires a three-phase electrical installation with a minimum amperage of 100 Amperes.

Profit Pack Dimensions

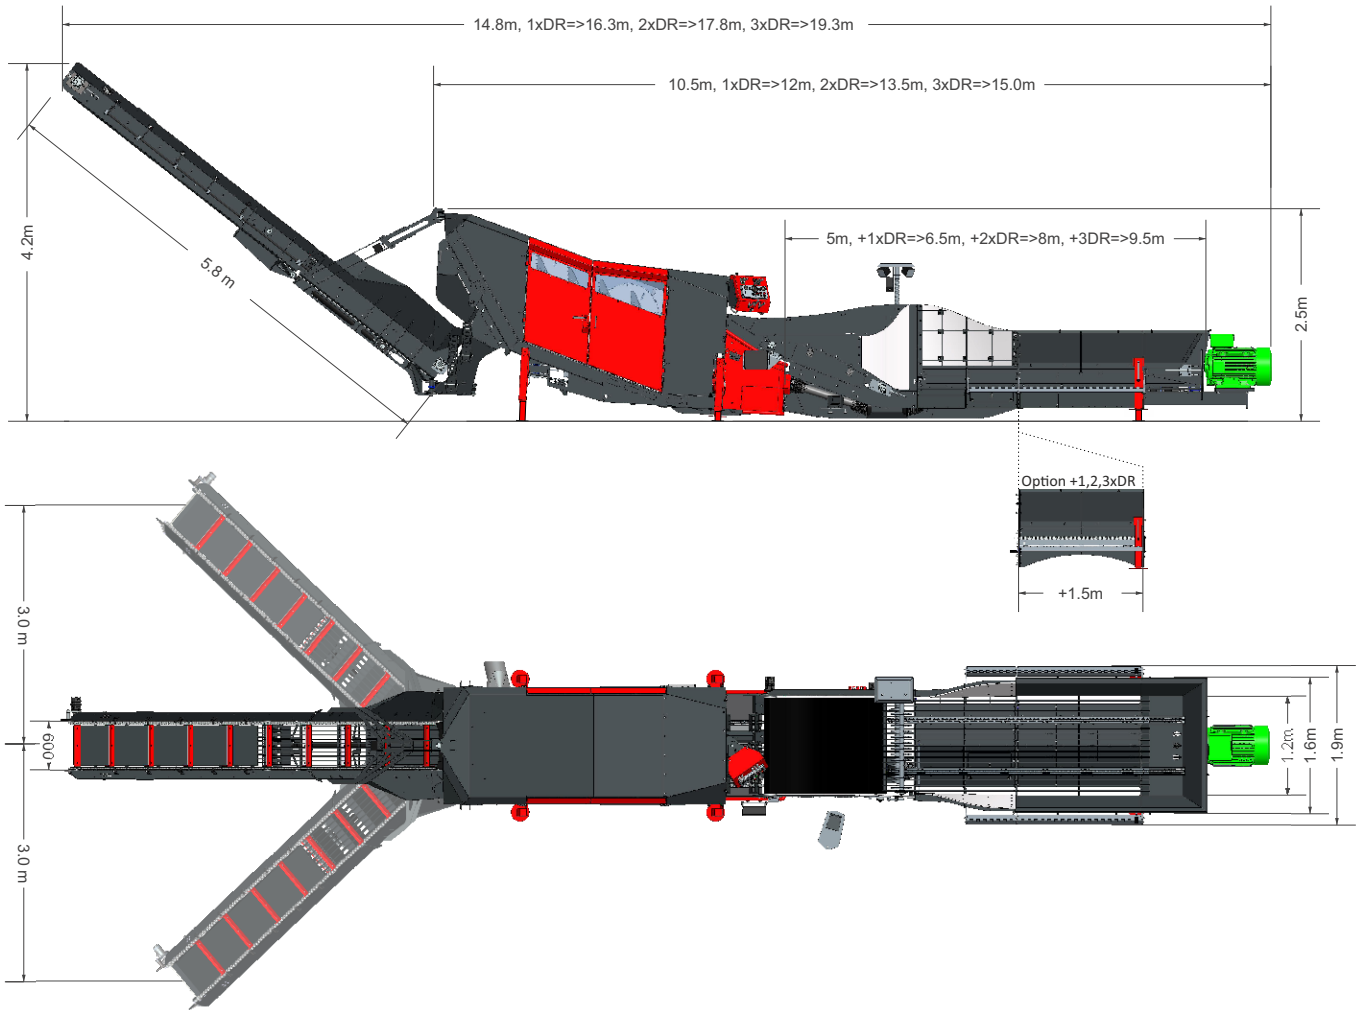

Static Pack list of standard equipment

Z	Very high-performance multi-blade sawing unit. Machine equipped with 3 circular saws Ø735mm with hydraulic drive.	9 130 kg
M	Cut-to-length saws at 1.02m. Lateral evacuation of extra lengths.	
T	Evacuation conveyor hydraulically adjustable to +/- 3m linked to the main chassis allowing the loading of trailers up to a height of 3.5m. High resistance cleats mounted on chains. Passive sifter for cleaning logs.	
A	Auxiliary hydraulic output dedicated to the deck.	
D	Automated loading and spreading deck for logs in bundle or in bulk with deck extension allowing a loading capacity of at least 3 cubic meters.	
DR		
DE	Driven by a 55kW electric motor allowing work on a fixed site equipped with a three-phases power supply. Minimum recommended amperage: 100 Amps. IP65 waterproof electrical control box Star-delta starting. Safety on phase inversion, phase absence, overcurrent, overheating winding.	

Static pack options

DR	1 to 3 additional deck extensions allowing a loading capacity of 4 to 7 bales.	+630kg/u
B	Original filling with biodegradable hydraulic oil.	NA

Your local dealer

